



SDVoE P2P Tx/Rx Extender

Peer-to-peer device extender connecting HMI devices, display & others

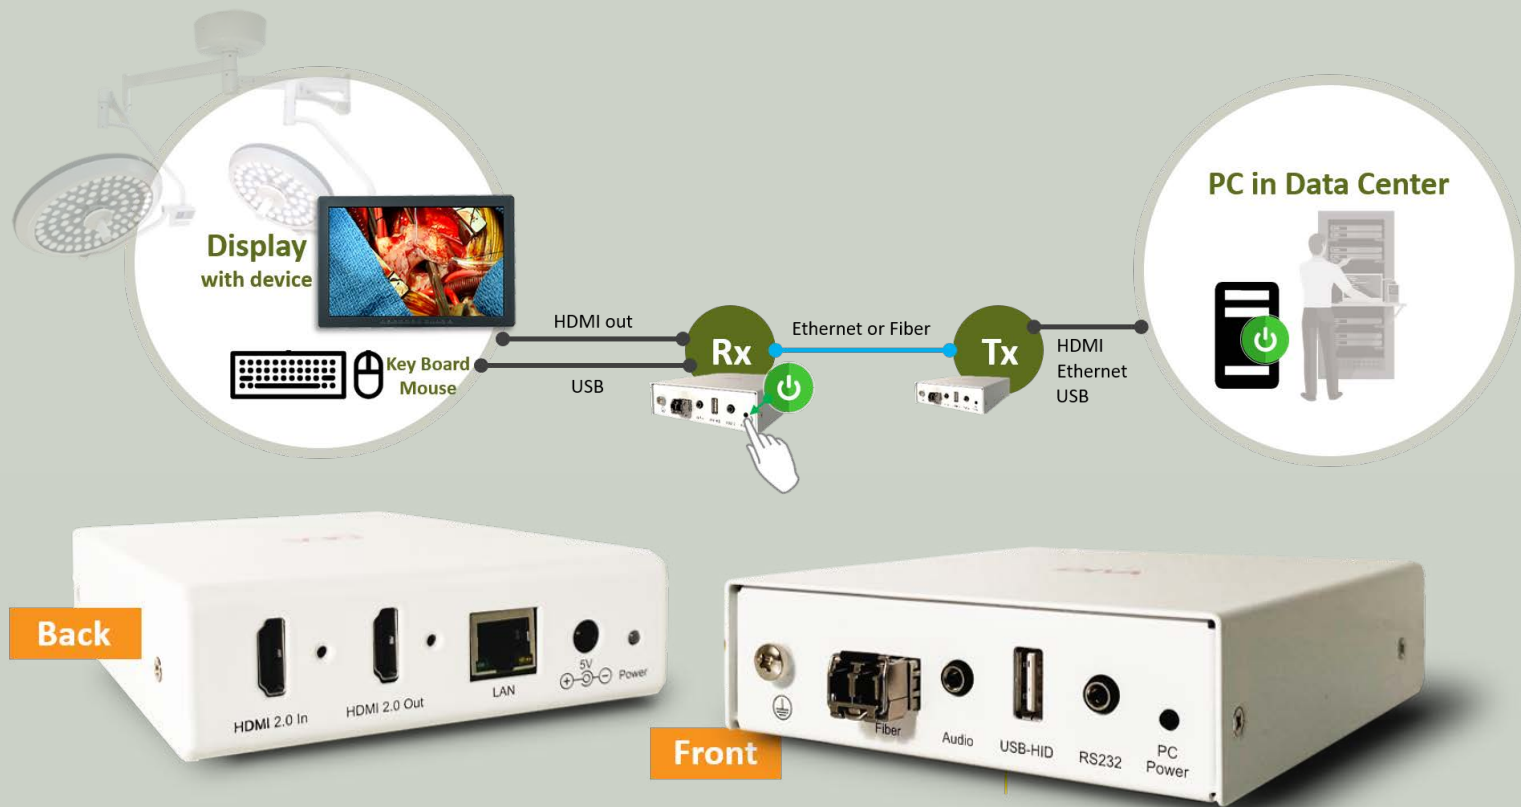

• I/O interface

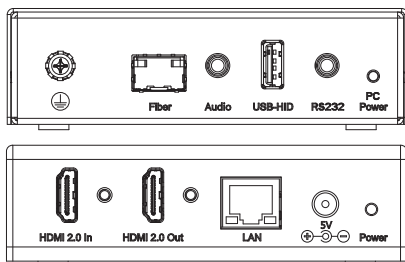

• Single cable support

- Video (Up to 4K)
- Sound
- RS232
- USB (HID) for keyboard, mouse&touch

• Medical ESD class A

• Support remote PC power on

• Remote control without software

	Tx Mode		Rx Mode
Input Interface	HDMI 2.0x1 3.5mm Phone Jackx1 USB-HID x1 RS-232 x1 RJ45x1		SFP+x1 (Fiber or RJ45)
Output Interface	SFP+x1 (Fiber or RJ45)		HDMI 2.0x1 3.5mm Phone Jackx1 USB-HID x1 RS-232 x1
Feature	Remote PC power on		
Supported Timing	4096x2160p @60Hz 3840x2160p @60Hz 1920x1080p @60/50Hz 1920x1200 @60Hz 1600x1200 @60Hz 1280x1024 @60Hz 1280x720p @60/50Hz		1024x768 @60Hz 800x600 @60Hz 720x480p @60/50Hz 720x400 @70Hz 640x480 @60Hz
Power Supply	DC 5V	Power Consumption (W)	9(Max)
Dimensions (WxHxD) (mm)	136*113*32.7	Weight (Kg)	0.54
Operating Temperature (°C)	0 to 40	Operating Humidity (RH)	30% to 75%
Storage Temperature (°C)	-20 to 60	Storage Humidity (RH)	10% to 90%
ESD Level	Medical 8kv/15kv class A with ground		
Certifications and Compliances	CE(EN 55032;EN 55024;EN 62368-1), FCC Part 15, ROHS, WEEE		